



Perforated Film

Type of material:

Perforated film made of polyethylene (PE)

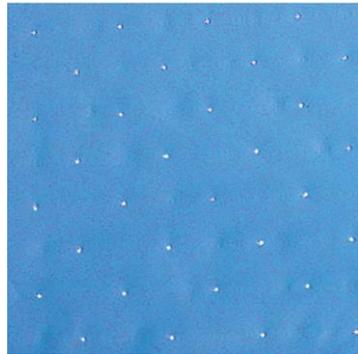

Lochfolie P1/Perforated film P1



Perforationsart
Type of perforation

Description:

Can be used in the following production methods:

- Vacuum bagging
- Resin infusion
- Prepreg

The perforated film is an optional consumable that has several purposes:

- Leaves a relative smooth surface on the composite.
- Holes enables evacuation of air and matrix material from the composite.
- Ensures a more even pressure distribution.
- Is self-releasing which ensures easy removal of the consumables on top of it.

Temperature:

125 °C is the highest operating temperature for the perforated film.

Thickness:

0.025 mm.

Size:

1 m wide.

Price:

10 DKK/m²

